

Dimmable LED Downlight




Features:

- Designed as a true MR16 50W Halogen replacement
- Replicates the look of traditional dichroic lamps
- High grade SHARP® LED chipset with uniform colour consistency and high CRI
- Over 63Lm/W LED efficiency
- Energy savings up to 80% when compared with traditional 50W MR16 halogen fixtures
- Excellent thermal design prolongs LED lifespan
- Does not emit harmful infrared or UV rays
- 85mm Cutout with 110mm outer diameter suits most retrofit applications
- Warm White (3000K) or Cool Natural White (4000K)
- Complete with LED dedicated constant current dimmable driver and flex / plug
- CRI > 83

Applications

Residential, commercial, retail, retrofit and where energy efficient lighting is required

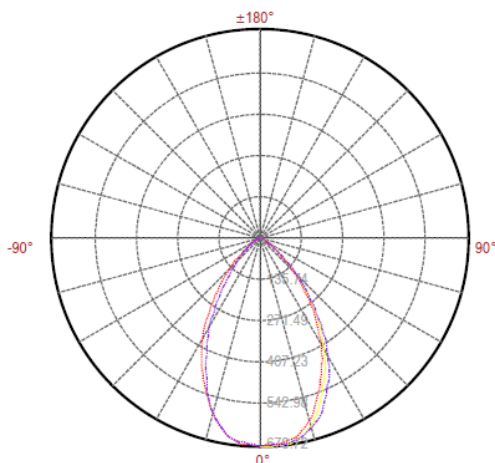

	Illuminance at a Distance	
	Center Beam LUX	Beam Width V H
2m	168.45 LUX	2.5m 2.6m
4m	42.11 LUX	5.0m 5.2m
6m	18.72 LUX	7.5m 7.7m
8m	10.53 LUX	10.0m 10.3m
10m	6.74 LUX	12.5m 12.9m
12m	4.68 LUX	15.0m 15.5m

Vert. Spread: 64.1 Horiz. Spread: 65.6

Part No.	Power	CCT	Beam Angle	Voltage	Luminous Flux	Cut-out	Height
PAK-LED-S102-13WB1-30-W	13W	3000K	60°	220~240V	840lm	Ø85mm	78mm
PAK-LED-S102-13WB1-40-W	13W	4000K	60°	220~240V	880lm	Ø85mm	78mm