


## Starlight Series LED commercial downlight




### Features:

- Die-cast aluminium alloy construction with powder coated finish
- High purity aluminium reflector maximizes reflectivity and use of light
- Embedded LED chipset design for better glare control
- High efficiency constant current Led driver
- Ideal for general light in large spaces

- **Energy-efficient, long lifespan:**

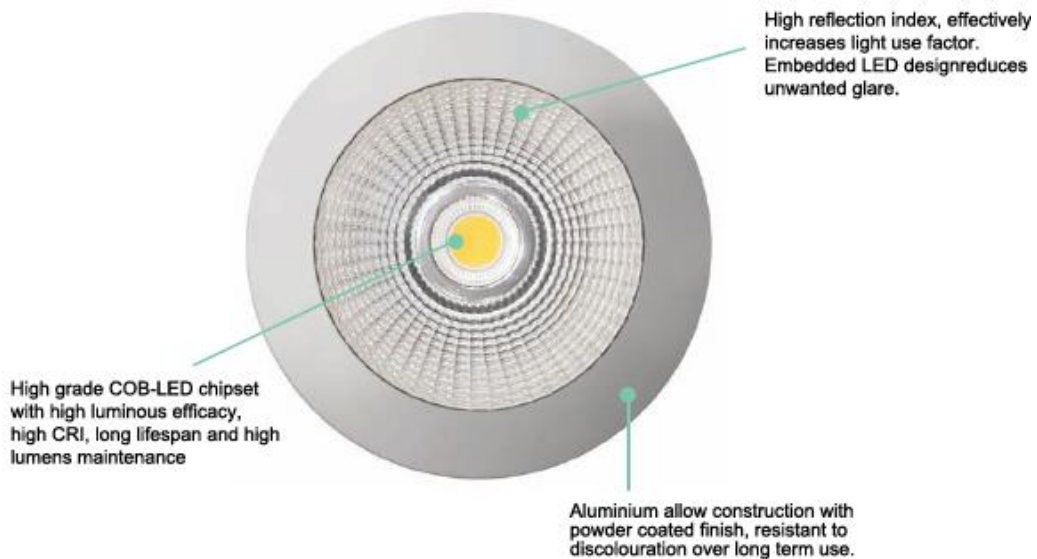




- **Excellent heat dissipation system, extends useful life of light fixture:**

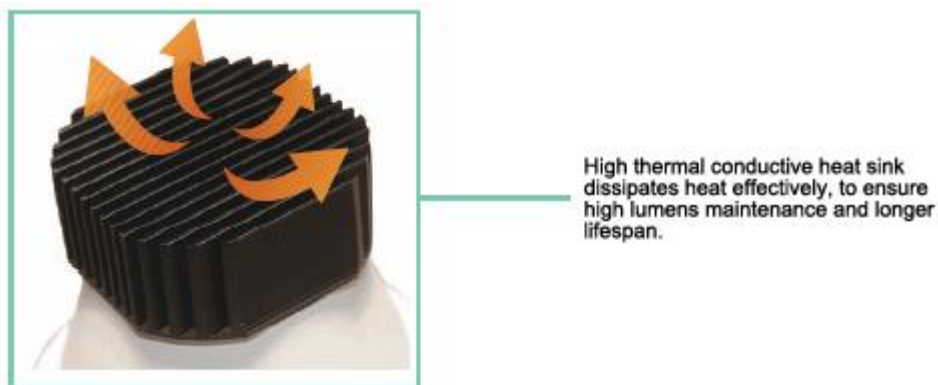



**PAK560190**

Colour: White  
 Material: Aluminium alloy  
 Size: 3 inch  
 Power: 10W  
 CCT: 4000K, 6000K





Code	Model No.	Part No.	Power	CCT	Cut-out	Lumens	Voltage	Weight
8003001001	PAK560190	PAK-LED-C102-10W3-40-W	10W	4000K	95 mm	520 lm	220-240 V	0.42 kg
8003001002	PAK560190	PAK-LED-C102-10W3-60-W	10W	6000K	95 mm	520 lm	220-240 V	0.42 kg



**PAK560200**

Colour: White  
 Material: Aluminium alloy  
 Size: 4 inch  
 Power: 15W  
 CCT: 4000K, 6000K






Code	Model No.	Part No.	Power	CCT	Cut-out	Lumens	Voltage	Weight
8003001502	PAK560200	PAK-LED-C102-15W4-40-W	15W	4000K	120 mm	860 lm	220-240 V	0.6 kg
8003001503	PAK560200	PAK-LED-C102-15W4-60-W	15W	6000K	120 mm	860 lm	220-240 V	0.6 kg



**PAK560220**

Colour: White  
 Material: Aluminium alloy  
 Size: 5 inch  
 Power: 15W  
 CCT: 4000K, 6000K






Code	Model No.	Part No.	Power	CCT	Cut-out	Lumens	Voltage	Weight
8003001503	PAK560210	PAK-LED-C102-15W6-40-W	10W	4000K	150 mm	1000 lm	220-240 V	0.8 kg
8003001503	PAK560210	PAK-LED-C102-15W6-60-W	10W	6000K	150 mm	1000 lm	220-240 V	0.8 kg



**PAK560220**

Colour: White  
 Material: Aluminium Alloy  
 Size: 5 inch  
 Power: 15W  
 CCT: 4000K, 6000K



Code	Model No.	Part No.	Power	CCT	Cut-out	Lumens	Voltage	Weight
8003002501	PAK560220	PAK-LED-C102-25W3-40-W	25W	4000K	170 mm	1660 lm	220-240 V	1.25 kg
8003002501	PAK560220	PAK-LED-C102-25W3-60-W	25W	6000K	170 mm	1660 lm	220-240 V	1.25 kg