

LED T8 Batten

The Next generation in LED lighting. Designed to replace traditional T8 fluorescent battens.

Features:

- Fixture Constructed from quality cold rolled steel. Post painted white finish
- UV stabilised PMMA cover with excellent light transmission
- High grade SMD LED with longer lifespan, luminous efficacy up 90lm/W,
- Energy savings up to 50% when compared to traditional T8 fluorescent battens
- Precise and consistent colour temperature and high CRI LED chipset
- Built-in constant current LED driver. PF > 0.95
- 30,000hrs lifespan
- 4000K or 6000K CCT Options
- Available options: Reflector, Non-Reflector
- Installation: Ceiling-mounted, Suspended
- Warranty: 36 Months

Applications:

Manufacturing, Education, Warehouse, Car park, Supermarket, etc.



Optional Reflector shown

General Replacement Guide to achieve equivalent light levels


Traditional Fluorescent T8	LED T8 Batten
2x36W 4ft	42W 4ft
2x18W 2ft	22W 2ft
1x36W 4ft	21W 4ft
1x18W 2ft	11W 2 ft




End to End Connection



Connected via Reflector Joiner

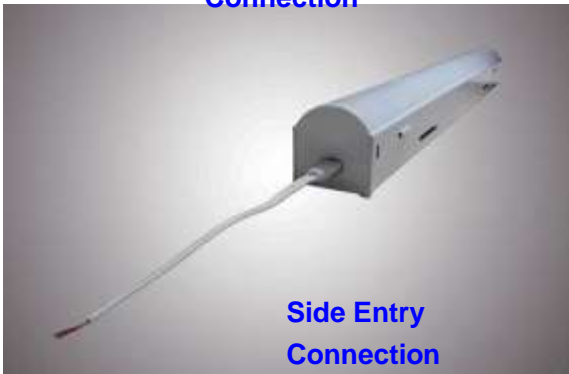

Side Entry Connection

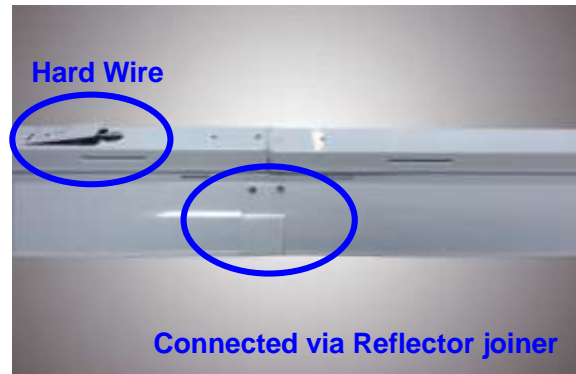

Hard Wire

Specifications

Model No.	Part No.	Power	CCT	Lumens	Voltage	Fixture Size (mm)	Pack QTY
PAK410030	PAK-LED-A02-11B-8600	11W	6000K	1002	180-240	600x55x53.5	12
PAK410060	PAK-LED-A02-22B-8600	22W	6000K	1996	180-240	600x55x53.5	12
PAK410050	PAK-LED-A02-21B-8600	21W	6000K	2026	180-240	1200x55x53.5	12
PAK410070	PAK-LED-A02-42B-8600	42W	6000K	3855	180-240	1200x55x53.5	12

For 4000K versions, replace last 3 digits of Part no. with 840

Accessories



Surface Mounted Clips (included)



Suspended Mounting Kit



Reflector Joiner



Flexible Connector



Reflector