

L86 LED Linear Light

Features

L86 LED Linear Light

- High quality aluminium-alloy housing
- Polyester powder coated finish to withstand arduous environments
- Professionally designed heat diffusing fins for prolonged lifespan
- Precision optical lens, achieves even lighting distribution and enhances luminous efficiency
- Superior grade high power LED chips
- High quality silicone sealant for increased weather proofing and protection of LED components
- IP65

LED Power Supply

- Quality cold-rolled steel housing with polyester coating
- Easy to install
- PF > 0.9


Applications

Wall washing, Facade, Amenity, Commercial Indoor, Landscape, etc.

Product Image & Fixture Diagram



Single Colour Version

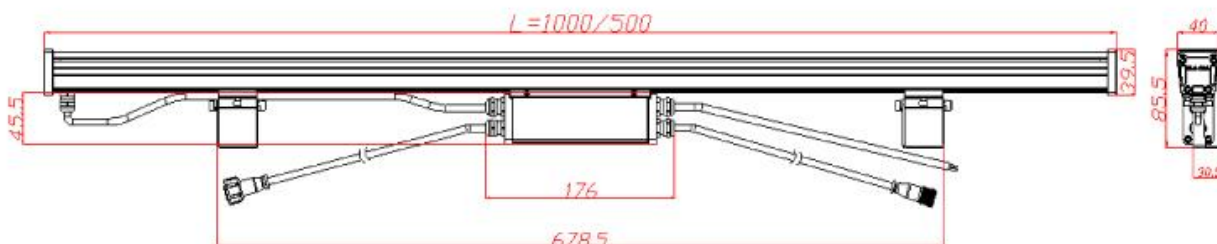


RGB Version

L86 LED Linear Light



350W LED Power Supply (Non-waterproof)

Lighting Distribution

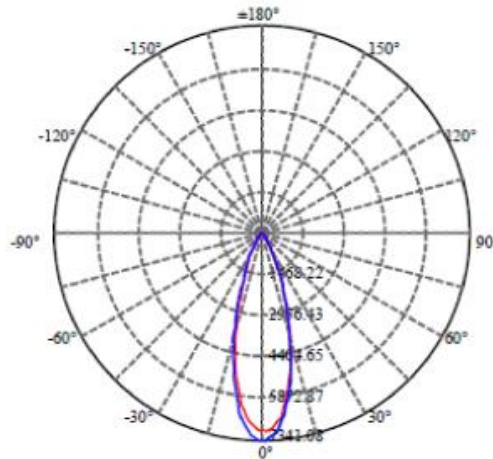

Tech Info

Model No.	Part No.	Power	Voltage	CCT	Beam Angle	IP Rating	Length (m)	Pack QTY
PAK463430	PAK-LED-L86-009C-Y	9W	DC24V	3000K	30°	IP65	0.5	8
PAK463431	PAK-LED-L86-009C-W	9W	DC24V	6000K	30°	IP65	0.5	8
PAK463432	PAK-LED-L86-018C-Y	18W	DC24V	3000K	30°	IP65	1	8
PAK463433	PAK-LED-L86-018C-W	18W	DC24V	6000K	30°	IP65	1	8
PAK463434	PAK-LED-L86-024C-Y	24W	DC24V	3000K	30°	IP65	1	8
PAK463435	PAK-LED-L86-024C-W	24W	DC24V	6000K	30°	IP65	1	8
PAK463436	PAK-LED-L86-036C-Y	36W	DC24V	3000K	30°	IP65	1	8
PAK463437	PAK-LED-L86-036C-W	36W	DC24V	6000K	30°	IP65	1	8
PAK463438	PAK-LED-L86-009C-RGB	9W	DC24V	RGB	30°	IP65	0.5	8
PAK463439	PAK-LED-L86-018C-RGB	18W	DC24V	RGB	30°	IP65	1	8
PAK463440	PAK-LED-L86-024C-RGB	24W	DC24V	RGB	30°	IP65	1	8
PAK463441	PAK-LED-L86-036C-RGB	36W	DC24V	RGB	30°	IP65	1	8
PAK070010	PAK-GY-B018B	DMX512	DC24V	-	-	-	-	1
PAK073500	PAK-GY-350F-24V	350W	180-240V	-	-	-	-	1