

Item: L01 Series LED Projector


Features

- High pressure die-cast aluminium housing
- Polyester powder coated finish to withstand arduous environments
- Compact design
- Professionally designed heat diffusing fins for prolonged LED lifespan
- Superior grade high power LED chips
- Precision optical lens, achieves even lighting distribution and enhances luminous efficiency
- IP65



Application

Facade, Amenity, Commercial Indoor, Landscape, etc



Product Image & Structure

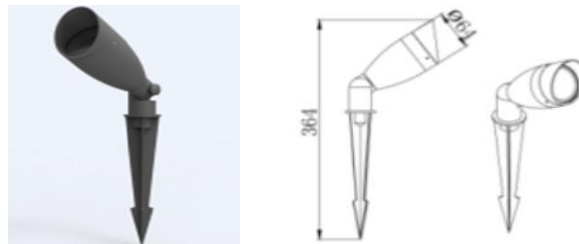



4W

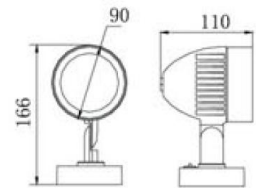

6W

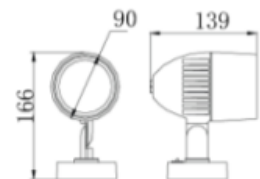

8W COB



12W COB

Item: L01 Series LED Projector

Specifications

| Model No. | Part No. | Power | CCT | Beam Angle | Voltage | Installation |
|-----------|-----------------------|-------|-------|------------|---------|----------------|
| PAK470322 | PAK-LED-L01-004-830-C | 4W | 3000K | 60° | 220V | Insert Version |
| PAK470323 | PAK-LED-L01-004-860-C | 4W | 6000K | 60° | 220V | Insert Version |
| PAK470324 | PAK-LED-L01-006-830-C | 6W | 3000K | 60° | 220V | Insert Version |
| PAK470325 | PAK-LED-L01-006-860-C | 6W | 6000K | 60° | 220V | Insert Version |
| PAK470326 | PAK-LED-L01-006-830-Z | 6W | 3000K | 60° | 220V | Base Version |
| PAK470327 | PAK-LED-L01-006-860-Z | 6W | 6000K | 60° | 220V | Base Version |
| PAK470328 | PAK-LED-L01-008-830-C | 8W | 3000K | 60° | 220V | Insert Version |
| PAK470329 | PAK-LED-L01-008-860-C | 8W | 6000K | 60° | 220V | Insert Version |
| PAK470330 | PAK-LED-L01-008-830-Z | 8W | 3000K | 60° | 220V | Base Version |
| PAK470331 | PAK-LED-L01-008-860-Z | 8W | 6000K | 60° | 220V | Base Version |
| PAK470332 | PAK-LED-L01-012-830-C | 12W | 3000K | 60° | 220V | Insert Version |
| PAK470333 | PAK-LED-L01-012-860-C | 12W | 6000K | 60° | 220V | Insert Version |
| PAK470334 | PAK-LED-L01-012-830-Z | 12W | 3000K | 60° | 220V | Base Version |
| PAK470335 | PAK-LED-L01-012-860-Z | 12W | 6000K | 60° | 220V | Base Version |