

Features:

- High grade Aluminium alloy construction with powder coated finish
- Excellent thermal control ensures the longevity of LED chips
- High output COB LED chipset with excellent colour consistency and high CRI
- Average lifespan over 30,000 hours
- External approved driver included
- Design as a fluorescent downlight replacement
- Warranty: 36 months

S101 Series Product Image



Frameless




Tech Info

Model No.	Part No.	Angle	CCT	Power	Beam Angle	Luminous Flux	CRI	Cut-out (mm)	Voltage
PAK565200	PAK-LED-S101-10WB1-30-W	Fixed	3000K	10W	24°	800lm	≥80	φ75	240V
PAK565200	PAK-LED-S101-10WB2-30-W	Adjustable	3000K	10W	24°	750lm	≥80	φ75	240V
PAK565200	PAK-LED-S101-10WB3-30-W	Round hole, Fixed	3000K	10W	24°	600lm	≥80	φ75	240V
PAK565200	PAK-LED-S101-10B4-30-W	Step-in, Fixed	3000K	10W	24°	800lm	≥80	φ75	240V
PAK565200	PAK-LED-S101-10WB5-30-W	Oval hole, Adjustable	3000K	10W	24°	650lm	≥80	φ75	240V
PAK565200	PAK-LED-S101-10WB6-30-W	Round hole, Fixed	3000K	10W	24°	600lm	≥80	φ75	240V
PAK565200	PAK-LED-S101-10WB7-30-W	Frameless, Fixed	3000K	10W	24°	800lm	≥80	φ75	240V
PAK565200	PAK-LED-S101-10WB8-30-W	Frameless, Step-in, Fixed	3000K	10W	24°	800lm	≥80	φ75	240V
PAK565200	PAK-LED-S101-10WB9-30-W	Frameless, Adjustable	3000K	10W	24°	750lm	≥80	φ75	240V
PAK565200	PAK-LED-S101-10WB10-30-W	Frameless, Oval hole, Adjustable	3000K	10W	24°	650lm	≥80	φ75	240V

Item: S101 S125 S129 Recessed LED Spotlight



S125 Series Product Image

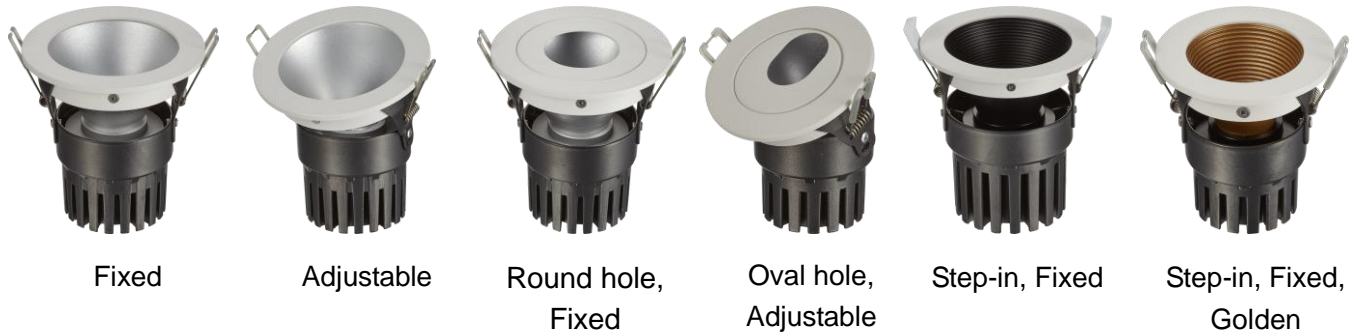

Tech Info

Model No.	Part No.	Angle	CCT	Power	Beam Angle	Luminous Flux	CRI	Cut-out (mm)	Voltage
PAK565250	PAK-LED-S125-9WB1-30-W	Round hole, Fixed	3000K	9W	24°	540lm	≥80	Φ75	240V
PAK565250	PAK-LED-S125-9WB2-30-W	Fixed	3000K	9W	24°	720lm	≥80	Φ75	240V
PAK565250	PAK-LED-S125-9WB3-30-WD	Step-in, Fixed	3000K	9W	24°	675lm	≥80	Φ75	240V
PAK565250	PAK-LED-S125-9WB4-30-WJ	Step-in, Fixed, Golden	3000K	9W	24°	675lm	≥80	Φ75	240V
PAK565250	PAK-LED-S125-9WB5-30-W	Adjustable	3000K	9W	24°	675lm	≥80	Φ75	240V
PAK565250	PAK-LED-S125-9WB6-30-W	Oval hole, Adjustable	3000K	9W	24°	585lm	≥80	Φ75	240V
PAK565260	PAK-LED-S125-12WB6-30-W	Oval hole, Adjustable	3000K	12W	24°	780lm	≥80	Φ95	240V
PAK565260	PAK-LED-S125-12WB5-30-W	Adjustable	3000K	12W	24°	900lm	≥80	Φ95	240V
PAK565260	PAK-LED-S125-12WB3-30-WD	Step-in, Fixed	3000K	12W	24°	900lm	≥80	Φ95	240V
PAK565260	PAK-LED-S125-12WB1-30-W	Round hole, Fixed	3000K	12W	24°	720lm	≥80	Φ95	240V
PAK565260	PAK-LED-S125-12WB2-30-W	Fixed	3000K	12W	24°	960lm	≥80	Φ95	240V
PAK565260	PAK-LED-S125-12WB4-30-WJ	Step-in, Fixed, Golden	3000K	12W	24°	900lm	≥80	Φ95	240V
PAK565460	PAK-LED-S125-20WB1-30-W	Round hole, Fixed	3000K	20W	24°	1200lm	≥80	Φ105	240V
PAK565460	PAK-LED-S125-20WB2-30-W	Fixed	3000K	20W	24°	1600lm	≥80	Φ105	240V
PAK565460	PAK-LED-S125-20WB3-30-WD	Step-in, Fixed	3000K	20W	24°	1500lm	≥80	Φ105	240V
PAK565460	PAK-LED-S125-20WB4-30-WJ	Step-in, Fixed, Golden	3000K	20W	24°	1500lm	≥80	Φ105	240V
PAK565460	PAK-LED-S125-20WB5-30-W	Adjustable	3000K	20W	24°	1500lm	≥80	Φ105	240V
PAK565460	PAK-LED-S125-20WB6-30-W	Oval hole, Adjustable	3000K	20W	24°	1300lm	≥80	Φ105	240V

Item: S101 S125 S129 Recessed LED Spotlight



S129 Series Product Image



Fixed



Adjustable



Round hole,
Fixed



Oval hole,
Adjustable



Step-in, Fixed



Step-in, Fixed,
Golden

Tech Info

Model No.	Part No.	Angle	CCT	Power	Beam Angle	Luminous Flux	CRI	Cut-out (mm)	Voltage
PAK565050	PAK-LED-S129-30WB1-30-W	Oval hole, Adjustable	3000K	30W	24°	1950lm	≥80	Φ120	240V
PAK565020	PAK-LED-S129-30WB2-30-W	Adjustable	3000K	30W	24°	2250lm	≥80	Φ120	240V
PAK565140	PAK-LED-S129-30WB3-30-WJ	Step-in, Fixed, Golden	3000K	30W	24°	2250lm	≥80	Φ120	240V
PAK565140	PAK-LED-S129-30WB4-30-WD	Step-in, Fixed	3000K	30W	24°	2250lm	≥80	Φ120	240V
PAK565110	PAK-LED-S129-30WB5-30-W	Fixed	3000K	30W	24°	2400lm	≥80	Φ120	240V
PAK565080	PAK-LED-S129-30WB6-30-W	Oval hole, Fixed	3000K	30W	24°	1800lm	≥80	Φ120	240V